

ABOVEGROUND DOMESTIC TANKS

120 - 2,000 wg



NEW!

PROUDLY FINISHED WITH
SHERWIN-WILLIAMS®

POWDURA® OneCure™
Super Durable Topcoat with Zinc Rich Primer

POWDURA® ONECURE™ TWO COAT SYSTEM PROPERTIES INCLUDE:

- Zinc rich epoxy primer
- Super durable TGIC polyester topcoat
- Superior corrosion and edge protection
- Patent pending formulated primer and topcoat



Containing Our World's Energy™

QUALITY YOU CAN DEPEND ON

- Durable powder coat finish
 - #72 liquid level outage valve orifice reduces refueling emissions
 - Vacuum pre-purged to save time, money and product
 - Steel galvanized domes available in select colors
 - Fabricated to the latest A.S.M.E. Code, Section VIII, Division 1
 - Registered with the National Board
 - Registered with CRN (Canadian Registration Number)
- Powder Coating is a green alternative to conventional painting that creates almost no VOC emissions and emits very little waste.


www.TrinityContainers.com Call Toll Free: 888-558-8265



TRINITY
CONTAINERS

Containing Our World's Energy™

ABOVEGROUND DOMESTIC TANKS

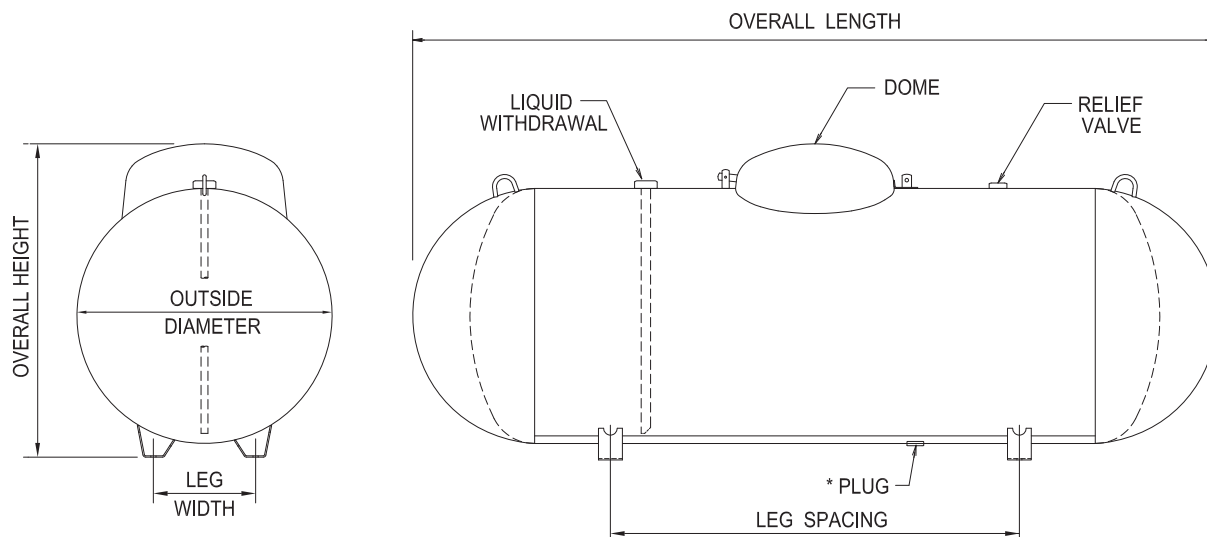


General Specifications

Conforms to the latest edition of the ASME code for Pressure Vessels, Section VIII, Division 1. Complies with NFPA 58.

Rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to a full (14.7 psi) vacuum.

Vessel Finish: Coated with TGIC powder.

Liquid withdrawal opening located under the dome on the 120wg vessels ONLY.

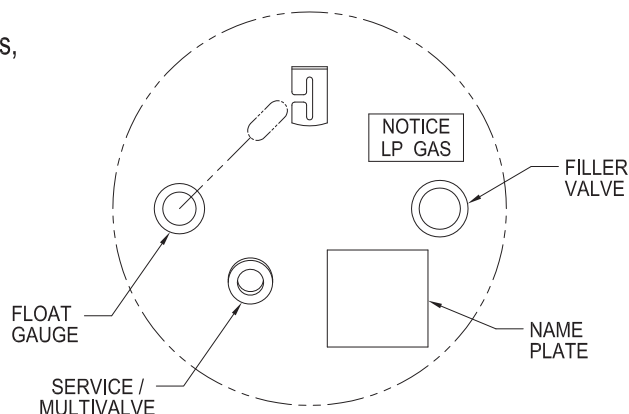

ABOVEGROUND VESSEL DIMENSIONAL INFORMATION

All vessels dimensions are approximate

WATER CAPACITY	OUTSIDE DIAMETER	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG WIDTH	LEG SPACING	WEIGHT	QUANTITY	
								FULL LOAD	PER STACK
* 120 wg. 454.2 L	24" 609.6 mm	Ellip	5' - 5 13/16" 1671.6 mm	2' - 8 1/4" 819.2 mm	10 1/8" 257.2 mm	3' - 0" 914.4 mm	245 lbs. 111.1 kg.	96	12
* 250 wg. 946.3 L	31.5" 800.1 mm	Hemi	7' - 2 1/2" 2197.1 mm	3' - 3 3/4" 1009.7 mm	12 3/4" 323.9 mm	3' - 6" 1066.8 mm	472 lbs. 214.1 kg.	63	9
* 320 wg. 1211.2 L	31.5" 800.1 mm	Hemi	8' - 11 3/4" 2736.9 mm	3' - 3 3/4" 1009.7 mm	12 3/4" 323.9 mm	4' - 0 1/4" 1225.6 mm	588 lbs. 266.7 kg.	45	9
500 wg. 1892.5 L	37.42" 950.5 mm	Hemi	9' - 10" 2997.2 mm	3' - 9 11/16" 1160.5 mm	15" 381.0 mm	5' - 0" 1524.0 mm	871 lbs. 395.1 kg	30	6
1000 wg. 3785.0 L	40.96" 1040.4 mm	Hemi	15' - 10 13/16" 4846.6 mm	4' - 1 3/8" 1254.1 mm	16 1/4" 412.8 mm	9' - 0" 2743.2 mm	1729 lbs. 784.3 kg	15	5
1465 wg. 5545.0 L	46.77" 1188 mm	Ellip	17' - 6 7/8" 5356.2 mm	4' - 4 3/4" 1339.9 mm	21" 533.4 mm	10' - 0" 3048 mm	2745 lbs. 1245 kg	12	4
2000 wg. 7570.0 L	46.77" 1188 mm	Ellip	23' - 9" 7239 mm	4' - 7" 1709.7 mm	21" 533.4 mm	14' - 0" 4267.2 mm	3676 lbs. 1667.5 kg	8	4

* DRAIN PLUG NOT AVAILABLE

Rev: Jan. 27, 2016